



PRODUCT CATALOG

DISCLAIMER: Contents of TAMCO publications are provided for informational purposes only. Nominal values for technical data are provided. For site-specific product information, contact your TAMCO representative. While every effort has been made to ensure the accuracy of these publications, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by TAMCO/JENNMAR terms and conditions. We reserve the right to modify or improve the designs or specifications of such products at any time without notice. Not all products are available in all areas.

©2023 TAMCO. All Rights Reserved.



All Locations

TAMCO TOOLS AND STEEL

1466 Delberts Drive
Monongahela, PA USA
Ph: (800) 826-2672

XCAL TOOLS of Clare

314 E. 4th Street
Clare, MI 48617
Ph: (989) 386-5376

XCAL TOOLS of Madisonville

3957 Anton Road
Madisonville, KY 42431
Ph: (270) 825-BITS (2487)

XCAL TOOLS of South Point

235 Commerce Drive
South Point, OH 45680
Ph: (740) 377-3354
Fax: (740) 377-3363

XCAL Industries

843 Lochgelly Road
Oak Hill, WV 25901
Ph: (304) 469-4721
Fax: (304) 469-475

XCAL TOOLS of Beckley

256 Industrial Drive
Oak Hill, WV 25901
Ph: (304) 465-0651
Fax: (304) 465-5244

XCAL TOOLS of Bristol

15020 Industrial Park Road
Bristol, VA 24202
Ph: (276) 644-3520
Fax: (276) 644-3523





QUALITY THAT EXCEEDS YOUR



For over 70 years, TAMCO has provided pneumatic tools, steels, and parts to customers around the World. From our humble beginnings in a Bethel Park, PA garage, we have grown into one of the biggest tool distributors in the USA.

TAMCO manufactures and distributes construction and demolition tools. These include paving breakers, rivet busters, chipping hammers, and many other air tools and tool steel.



Contact us today for any pneumatic tool and steel needs!

(800) 826-2672

www.tamcotools.com

EXPECTATIONS



Table of Contents

General Information and Terms of Sale	8
Paving Breakers*	9
Clay Diggers/Trenchers*	10
Paving Breaker Steel.....	11-13
Paving Breaker Accessories	14
Rock Drills*	15
Detachable Bit Hollow Drill Steel.....	16
Threaded Rock Bits	17
Whirlibit-Speed Drills	18
Carbide Tipped Hollow Drills.....	19
Rivet Busters and Tampers*	20
American Made Rivet Busters*	21
Rivet Buster Steel	22-23
New! Rivet Buster Bushing Tool	22
Chipping Hammers*	24-25
Chipping Hammer Steel	26-27
Impact Wrench*	27
Manifolds and Dust Collection Units.....	28
Weld Flux and Needle Scalers/Rammers*	29
Weld Flux/Miscellaneous Scaler Steel	30
.401 Air Hammer & Wizard Demolition Tool*	31
Scabblers and Scabblers Accessories.....	31
Air Tool Accessories.....	32-34
Electric Demo Hammer Steel	35
Boom Mounted Demolition Tools	36
Hand Tools	37-38
Maintenance Bars.....	39
General Tool Maintenance.....	40
Tool Racks & Steel Display Cases	41

*AIR TOOLS



General Information and Terms of Sale

TERMS OF SALE

This price manual supercedes all other catalogs and/or price lists. All prices are subject to change without notice.

SHIPPING TERMS

- FOB: Shipping Point (unless noted otherwise at time of sale)
- Minimum Invoice: \$50.00 Net, this excludes freight and tax where applicable
- Returned Goods: TAMCO will not accept returns without prior authorization. All returns are subject to a 25% restocking fee.
- No credit will be issued without proper documentation. All material must be returned in new condition.

SHORTAGES AND/OR DAMAGES

- Never accept any shortages or damaged shipments without making a notation on the bill of lading.
- TAMCO Inc., must be notified promptly of any shortages/damages or claims will not be considered.
- TAMCO Inc., cannot be held responsible for delivery delays due to strikes, fires, or other conditions outside of our control. Our responsibility ceases when goods are received by freight carriers in new condition.
- All published weights are approximate. Actual shipping weights may vary.

CREDIT POLICY

- TAMCO's credit terms are 1% -10 days, Net 30 days. (This discount applies only to merchandise; all freight charges are due in full.)
- Repeated deviations or violation of our 30 day terms will result in an account being placed on credit hold and/or COD status.
- Accounts with invoices unpaid beyond 60 days will be placed on credit hold and no further tools or parts will be sold until the account is current (No invoices open beyond 30 days).
- In the event collections are required, the customer is responsible for all costs of collection.

PNEUMATIC TOOL LIMITED WARRANTY

TAMCO Inc., warrants its pneumatic tools to be free of defects in materials and workmanship, to the original purchaser, for a period of one year from the date of purchase. This warranty will not apply to any tool which TAMCO Inc., deems to have been abused, modified, misused, improperly maintained, inadequately lubricated, or repaired by anyone other than an authorized TAMCO repair house. Authorization to return any pneumatic tool for evaluation must be obtained from TAMCO's customer service staff prior to return. All returns must be shipped prepaid to:

TAMCO, INC. - 1466 Delberts Drive, Monongahela, PA 15063

No collect shipments will be accepted. Pneumatic tools shipped without authorization will be returned to the customer. TAMCO Inc., guarantees to repair or replace (at TAMCO's discretion) pneumatic tools at no charge to the original purchaser if defects in materials or workmanship exist at the time of inspection. TAMCO Inc., makes no other expressed and/or implied warranty. Under no circumstances will TAMCO Inc., be liable for damage to property or person, death, consequential, incidental, indirect or special damages of any nature arising from the sale or use of pneumatic tools.

GENERAL TOOL WARRANTY

TAMCO Inc., products are guaranteed against defects and workmanship. TAMCO Inc., cannot be responsible for failures due to normal wear. Any product that has been modified, misused, abused, or suffered a lack of proper maintenance will not be recognized for a warranty claim. Warranty consideration will be given to any product found to have defects in workmanship or materials at the time of inspection. No other warranty is expressed or implied. Never use a tool for a purpose other than it's intended or designed use.

SAFETY WARNINGS AND CAUTIONS

- ALWAYS wear approved safety gear such as hearing protection, safety glasses, hard hats, and safety shoes when using tools.
- ALWAYS use the proper tool for the job. Do not use any tool other than the manner in which it was intended or designed.
- NEVER strike a tool designed for an air hammer with a hand held hammer.
- NEVER use a pneumatic tool for prying. This can cause tool failure and/or operator injury.
- NEVER use a dull or improperly maintained tool. Failure to properly maintain tools will lead to tool failure and/or operator injury.
- ALWAYS properly maintain air hammers. Worn parts, bushings, pistons, springs, etc can and will lead to premature tool failure.
- ALWAYS warm tools prior to use in freezing temperatures.
- NEVER alter any tool in any way. This can cause tool failure and/or operator injury.
- ALWAYS use a silicon carbide grinding wheel on dull tools or drills with carbide cutting edges. Drills should be sharpened regularly after drilling 25 or more holes, depending on the hardness and abrasiveness of the material.
- NEVER allow a pneumatic hammer to run idly. This practice allows undue stress to build in the tool and can lead to premature tool failure and/or operator injury.
- ALWAYS use tools in accordance with all OSHA and MSHA regulations.



Air Tools - Paving Breakers

Toku Paving Breakers offer a rugged and reliable tool for whatever task you may have for them. Toku breakers are available in 30, 40, 60, and 90 pound classes. All Toku breakers feature a rugged four bolt back head, drop forged alloy steel construction, forged latch retainers, replaceable chuck bushings, and safety levers. Optional mufflers are available.



PB90



PB60



PB40



PB30

	PB90	PB60	PB40	PB30
Shank Size	1-1/8" x 6" 1-1/4" x 6"	1-1/8" x 6" 1-1/4" x 6"	1" x 4-1/4"	7/8" x 3-1/4" 1" x 4-1/4"
Piston Stroke	6" (152mm)	4" (100mm)	5-3/4" (146mm)	3-11/32" (85mm)
Piston Diameter	2-5/8" (66.67mm)	2-1/4" (57.15mm)	1-3/4" (44mm)	1-3/4" (44.45mm)
Impact Rate	1,250 BPM	1,400 BPM	1,100 BPM	1,550 BPM
Weight	92.4 lbs (42 kg.)	66 lbs. (30 kg.)	39.6 lbs. (18 kg.)	33 lbs. (15 kg.)
Overall Length	28-1/2" (723mm)	25-3/8" (645mm)	26" (660mm)	22-1/4" (564mm)
Air Consumption	77 CFM	70 CFM	56 CFM	49 CFM
Air Inlet Thread	3/4" NPT	3/4" NPT	1/2" NPT	3/8" NPT
Hose Size	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)

Visit us online for quote requests and more:
www.tamcotools.com



Air Tools - Clay Diggers / Trenchers

When it comes to digging packed soil and clay from around forms, footers, or any other construction area, you can be sure TAMCO has a Toku digger to fit your needs. With three models to choose from, you are sure to find the right tool for the job at hand. The TCD-30 and TCD-20 are D-handled tools that offer maneuverability and strength in a compact package. The TRC-30 offers the comfort and control of a T-handle with the same power and performance as the TCD-30.



TD30

CD30


CD20

	TD30	CD30	CD20
Shank Size	7/8" x 3-1/4" 1" x 4-1/4"	7/8" x 3-1/4" 1" x 4-1/4"	7/8" x 3-1/4"
Piston Stroke	3-11/32" (85mm)	3-11/32" (85mm)	2-3/8" (60mm)
Piston Diameter	1-3/4" (44.45mm)	1-3/4" (44.45mm)	1-11/16" (42.85mm)
Impact Rate	1,550 BPM	1,550 BPM	2,000 BPM
Weight	36 lbs. (16.3 kg.)	30 lbs. (13.6 kg.)	22 lbs. (10 kg.)
Overall Length	29" (736mm)	22" (559mm)	20" (520mm)
Air Consumption	49 CFM	49 CFM	38 CFM
Air Inlet Thread	3/8" NPT	3/8" NPT	1/2" NPT
Hose Size	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)




Call today (800) 826-2672

Paving Breaker Steel

Product	Narrow Chisel	Moil Point	Shank Size	Length UC	Wt./Lb.	Box Qty.
 <p>Moil Points</p>	4001-014	4011-014	7/8" x 3-1/4"	14"	3.25	12
	4001-018	4011-018		18"	4.00	12
	4001-024	4011-024		24"	5.25	Box Quantities Vary
	4001-036	4011-036		36"	7.50	
	4001-048	4011-048		48"	9.75	
	4001-060	4011-060		60"	12.00	
	4001-072	4011-072		72"	14.25	
	4001-084	4011-084		84"	16.50	
	4001-096	4011-096		96"	18.00	
	4002-014	4012-014	1" x 4-1/4"	14"	4.50	12
	4002-018	4012-018		18"	5.50	10
	4002-024	4012-024		24"	6.75	Box Quantities Vary
	4002-036	4012-036		36"	10.00	
	4002-048	4012-048		48"	13.00	
	4002-060	4012-060		60"	15.75	
	4002-072	4012-072		72"	18.75	
	4002-084	4012-084		84"	21.75	
	4002-096	4012-096		96"	24.50	
 <p>Narrow Chisels</p>	4003-014	4013-014	1-1/8" x 6"	14"	6.00	8
	4003-018	4013-018		18"	7.25	7
	4003-024	4013-024		24"	9.50	Box Quantities Vary
	4003-036	4013-036		36"	13.25	
	4003-048	4013-048		48"	17.00	
	4003-060	4013-060		60"	20.50	
	4003-072	4013-072		72"	24.00	
	4003-084	4013-084		84"	28.00	
	4003-096	4013-096		96"	31.75	
	4004-014	4014-014	1-1/4" x 6"	14"	7.50	8
	4004-018	4014-018		18"	9.00	7
	4004-024	4014-024		24"	11.25	Box Quantities Vary
	4004-036	4014-036		36"	15.75	
	4004-048	4014-048		48"	20.50	
	4004-060	4014-060		60"	25.00	
	4004-072	4014-072		72"	29.50	
	4004-084	4014-084		84"	34.00	
	4004-096	4014-096		96"	38.75	


Longer lengths available


Product	Narrow Chisel	Moil Point	Shank Size	Length UC	Wt./Lb.
 <p>Heavy Duty Moil Points and Narrow Chisels</p>	4001-014H	4011-014H	7/8" x 3-1/4"	14"	3.75
	4001-018H	4011-018H		18"	4.50
	4002-014H	4012-014H	1" x 4-1/4"	14"	5.25
	4002-018H	4012-018H		18"	6.25
	4003-014H	4013-014H	1-1/8" x 6"	14"	6.75
	4003-018H	4013-018H		18"	8.25
	4004-014H	4014-014H	1-1/4" x 6"	14"	8.00
	4004-018H	4014-018H		18"	9.75

Visit us online for quote requests and more:
www.tamcotools.com



Paving Breaker Steel


Product	Part Number	Shank Size	Length UC	Wt./Lb.	Box Qty.
 <p>3" Wide Chisels</p> <p>** Longer lengths available **</p>	4021-014	7/8" x 3-1/4"	14"	3.25	12
	4021-018		18"	4.00	12
	4021-024		24"	5.50	N/A
	4021-036		36"	8.00	
	4021-048		48"	10.00	
	4021-060		60"	12.25	
	4021-072		72"	14.00	
	4021-096		96"	18.25	
	4022-014	1" x 4-1/4"	14"	4.50	12
	4022-018		18"	5.50	10
	4022-024		24"	7.50	N/A
	4022-036		36"	10.00	
	4022-048		48"	12.75	
	4022-060		60"	16.50	
	4022-072		72"	19.25	
	4022-084		84"	22.00	
	4022-096	96"	24.00		
	4023-014	1-1/8" x 6"	14"	6.00	8
	4023-018		18"	7.25	7
	4023-024		24"	9.75	N/A
	4023-036		36"	13.50	
	4023-048		48"	17.25	
	4023-060		60"	21.00	
	4023-072		72"	24.75	
	4023-084		84"	28.50	
	4023-096	96"	32.00		
	4024-014	1-1/4" x 6"	14"	7.50	8
	4024-018		18"	9.00	6
4024-024	24"		12.25	N/A	
4024-036	36"		16.75		
4024-048	48"		21.25		
4024-060	60"		26.00		
4024-072	72"		30.00		
4024-084	84"		35.00		
4024-096	96"	39.50			


Product	Part Number	Shank Size	Length UC	Wt./Lb.	Box Qty.
 <p>Heavy Duty 3" Wide Chisels</p>	4021-014H	7/8" x 3-1/4"	14"	5.00	N/A
	4021-018H		18"	6.00	
	4022-014H	1" x 4-1/4"	14"	5.25	
	4022-018H		18"	6.25	
	4023-014H	1-1/8" x 6"	14"	7.00	
	4023-018H		18"	8.25	
	4021-072	1-1/4" x 6"	14"	8.50	
	4021-096		18"	10.25	





Call today (800) 826-2672

Paving Breaker Steel


Product	Part Number	Shank Size	Blade Size	Wt./Lb.
Asphalt Cutters 	4061-012	7/8" x 3-1/4"	5" x 6"	7.00
	4062-012	1" x 4-1/4"		7.25
	4063-012	1-1/8" x 6"		8.50
	4064-012	1-1/4" x 6"		11.00


Product	Part Number	Shank Size	Length UC	Blade Size	Wt./Lb.
Combo Cutters 	4063-011.5	1-1/8" x 6"	11-1/2"	3.5"	8.05
	4064-011.5	1-1/4" x 6"			8.65


Product	Part Number	Shank Size	Blade Size	Wt./Lb.
Clay Spades 	4111-016	7/8" x 3-1/4"	5-1/2"	7.00
	4102-016	1" x 4-1/4"		7.25
	4103-016	1-1/8" x 6"		8.50
	4104-016	1-1/4" x 6"		11.00
	4102-916	1" x 4-1/4"	4-1/2"	7.00
	4103-916	1-1/8" x 6"		8.00
	4104-916	1-1/4" x 6"		10.50


Product	Part Number	Shank Size	Blade Size	Wt./Lb.
Bushing Tools  2" x 2" Pad	4131-012	7/8" x 3-1/4"	12"	5.00
	4132-009	1" x 4-1/4"		6.50
	4133-009	1-1/8" x 6"		7.00
	4134-009	1-1/4" x 6"		7.25

Paving Breaker Accessories

Ground Rod Drivers	Part Number	Shank Size	Rod Size	Hole Dia.	Wt./Lb.
	4162-609	1" x 4-1/4"	5/8"	11/16"	5.25
	4162-709		3/4"	13/16"	
	4162-809		7/8"	1"	
	4162-909		1"	1-1/8"	
	4163-609	1-1/8" x 6"	5/8"	11/16"	6.75
	4163-709		3/4"	13/16"	
	4163-809		7/8"	1"	
	4163-909		1"	1-1/8"	
	4164-609	1-1/4" x 6"	5/8"	11/16"	7.25
	4164-709		3/4"	13/16"	
	4164-809		7/8"	1"	
	4164-909		1"	1-1/8"	

Detachable Shanks	Part Number	Shank Size	Description	Wt./Lbs.
	44-00307S	7/8" x 3-1/4"	Shank 9" Under Collar	3.75
	44-00308S	1" x 4-1/4"		4.50
	44-00309S	1-1/8" x 6"		5.25
	44-00310S	1-1/4" x 6"		6.00
	44-00308L	1" x 4-1/4"	Large Taper Shank 9" Under Collar	4.50
	44-00309L	1-1/8" x 6"		5.25
	44-00310L	1-1/4" x 6"		6.00

Tamping Pads	Part Number	Description	Wt./Lbs.
(Pads Only) **Use Large Taper Detachable Shanks**	44-01352	7" Round Pad	11.75
	44-01360	6" Square Pad	10.00
	44-01362	8" Square Pad	14.50

Sign Post Driver	Part Number	Description	Wt./Lbs.
(Heads Only) **Use Small Taper Detachable Shanks**	44-01910	3-1/2" ID Driver Only	14.25
	44-01911	Post Block Insert Only	4.00



Call today (800) 826-2672

Air Tools - Rock Drills

We offer multiple rock drills for a wide variety of applications. Whether you are drilling through rock, concrete, or brick, TAMCO offers a rock drill that will fit your distinct requirements.


The Toku TS-55 rock drill has all the power needed for the biggest jobs. It features rugged construction and is designed for larger diameter bits and deeper drilling jobs.

The Toku TJ-20 and TJ-15 are mid-sized rock drills that pack a big punch. These drills are great for road building, shaft sinking, quarrying, as well as general demolition or construction work. Both models include standard, removable in line oilers.

The TAMCO CP9-A and Toku THD-1100N are lightweight drills that are able to get into smaller spaces other drills cannot. These D-handled drills pack big power in a compact package. Recommended operation pressure is 80 - 90 PSI. Exceeding 90 PSI may cause internal damage.

*** Due to rotation of the THD-1100N, this tool must use Whirlibit-Speed Drill Bits ONLY.***

All rock drills feature replaceable chuck bushings, drop forged alloy steel construction, and forged latch retainers. Mufflers are available for the TJ-20, and TJ-15 models. TJ-20 and TJ-15 models include Clear-View in line oilers.

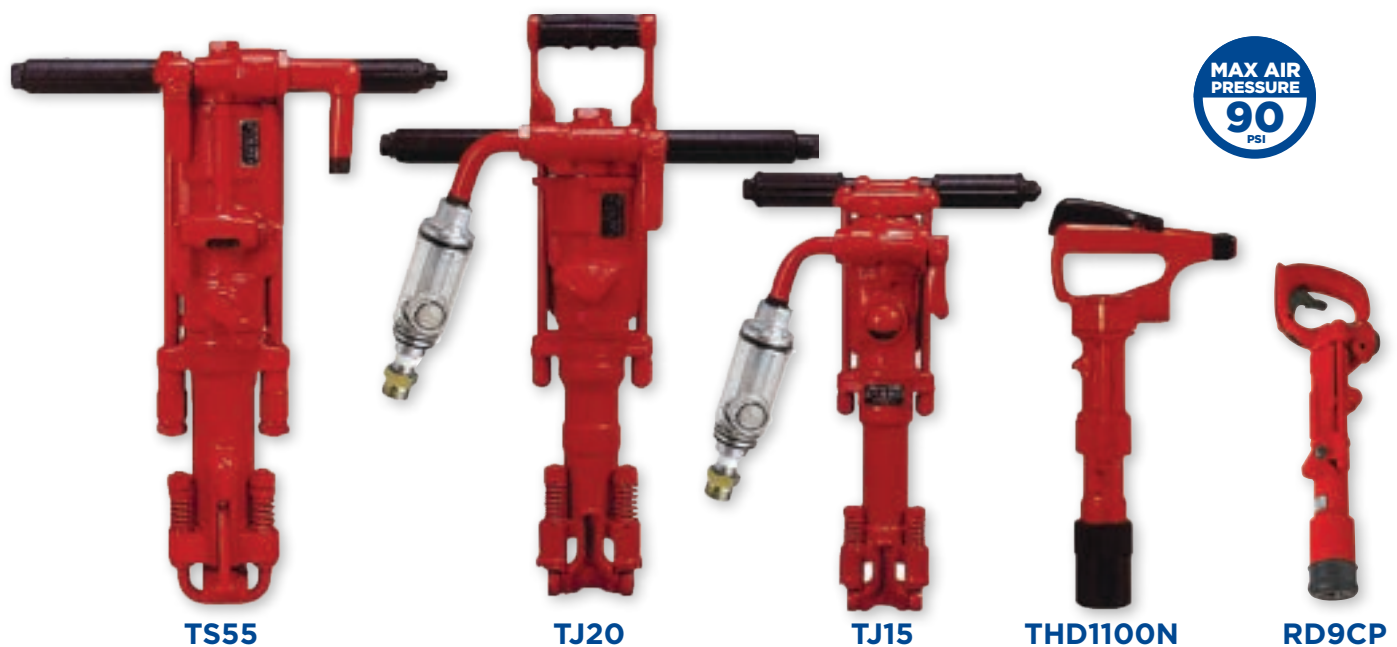

	TS55	TJ20	TJ15	THD1100N	RD9CP
Shank Size	7/8" x 3-1/4" 7/8" x 4-1/4" 1" x 4-1/4"	7/8" x 3-1/4" 7/8" x 4-1/4"	7/8" x 3-1/4" 7/8" x 4-1/4"	7/8" x 3-1/4"	3/4" Round Slotted
Piston Stroke	2-9/16" (65mm)	1-15/16" (49mm)	1-3/4" (45mm)	1-7/32" (31mm)	1-3/8"
Piston Diameter	2-5/8" (66.6mm)	2-11/16" (68mm)	2-1/8" (54mm)	1-1/2" (38mm)	1-1/4"
Impact Rate Speed	1,800 BPM 200 RPM	2,400 BPM 200 RPM	2,450 BPM 250 RPM	3,200 BPM 350 RPM	3,400 BPM 185 RPM
Weight	59.4 lbs. (27 kg.)	40.7 lbs. (18.5 kg.)	30.8 lbs. (14 kg.)	11.4 lbs. (5.2 kg.)	8 lbs. (3.63 kgs.)
Overall Length	22-3/8" (568mm)	24-1/32" (610mm)	18-1/2" (468mm)	16-17/32" (420mm)	14-3/4"
Air Consumption	91.81 CFM	87.5 CFM	56 CFM	28.3 CFM	20 CFM
Air Inlet Thread	3/4" NPT	3/4" NPT	3/4" NPT	3/8" NPT	3/8" NPT
Hose Size	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)	1/2" (12.7mm)	1/2" (12.7mm)

Visit us online for quote requests and more:
www.tamcotools.com



Detachable Bit Hollow Drill Steel



7/8" x 3-1/4" Shank H-Thread

Length U.C.	Part Number	Wt./Lb.
12"	H7312	3.00
18"	H7318	4.00
24"	H7324	5.00
30"	H7330	6.00
36"	H7336	7.00
48"	H7348	9.00
60"	H7360	11.00
72"	H7372	14.00
96"	H7396	18.00
120"	H73120	22.00

1" x 4-1/4" Shank H-Thread

Length U.C.	Part Number	Wt./Lb.
12"	H1412	4.00
18"	H1418	5.00
24"	H1424	7.00
30"	H1430	9.00
36"	H1436	10.00
48"	H1448	12.00
60"	H1460	15.00
72"	H1472	18.00
96"	H1496	23.00
120"	H14120	28.00

7/8" x 3-1/4" Shank E-Thread

Length U.C.	Part Number	Wt./Lb.
12"	E7312	2.75
18"	E7318	3.00
24"	E7324	3.50
30"	E7330	5.00
36"	E7336	5.75
48"	E7348	8.00
60"	N/A	-
72"	N/A	-

1" x 4-1/4" 1" Rope Thread

Length U.C.	Part Number
18"	RT1001418
24"	RT1001424
30"	RT1001430
36"	RT1001436
48"	RT1001448
60"	RT1001460



7/8" x 4-1/4" Shank H-Thread

Length U.C.	Part Number	Wt./Lb.
12"	H7412	3.25
18"	H7418	4.25
24"	H7424	5.25
30"	H7430	6.25
36"	H7436	7.25
48"	H7448	9.25
60"	H7460	12.00
72"	H7472	13.25

H-Thread Extensions

Length U.C.	Part Number	Wt./Lb.
24"	H24X	7.00
36"	H36X	10.00
48"	H48X	12.00
72"	H72X	18.00
96"	H96X	23.00

Couplings and Adaptors

Description	Part Number	Wt./Lb.
Coupling	HCPL	0.50
H to D Adaptor	H-DCPL	0.75

1" x 4-1/4" Shank D-Thread

Length U.C.	Part Number	Wt./Lb.
12"	D1412	4.25
18"	D1418	5.50
24"	D1424	6.50
30"	N/A	-
36"	D1436	9.25
48"	D1448	11.00
60"	N/A	-
72"	D1472	15.00

7/8" x 3-1/4" 11 Degree Tapered Steel

Length U.C.	Part Number
12"	DS7312-11
18"	DS7318-11
24"	DS7324-11
30"	DS7330-11
36"	DS7336-11
42"	DS7342-11
48"	DS7348-11
60"	DS7360-11

Also available in 7/8" x 4-1/4" and 1"



Call today (800) 826-2672

Threaded Rock Bits

Multi-Use Threaded Carbide Rock Bits

Bit Diameter Inch	Bit Diameter MM	Part Number	Wt./Lb.	Carbide Height (MM)	Carbide Width (MM)
1-3/8"	35	HTI-137H	0.50	14	8
1-1/2"	38	HTI-150H	0.60	14	8
1-5/8"	41	HTI-162H	0.65	14	8
1-3/4"	45	HTI-175H	0.80	14	8
1-7/8"	48	HTI-187H	0.90	14	8
2"	51	HTI-200H	1.10	14	8
2-1/4"	57	HTI-225H	1.20	14	8
2-1/2"	64	HTI-250H	1.30	14	9.5
2-3/4"	70	HTI-275H	1.55	20	12
3"	76	HTI-300H	3.00	23	12
3-1/2"	89	HTI-350H	3.00	16	12
4"	101	HTI-400H	3.65	16	12




Rebar Cutter Bits H-Thread

Bit Diameter Inch	Part Number
1-3/8"	HTI-137HRB
1-1/2"	HTI-150HRB
1-5/8"	HTI-162HRB
1-3/4"	HTI-175HRB
1-7/8"	HTI-187HRB
2"	HTI-200HRB
2-1/4"	HTI-225HRB
2-1/2"	HTI-250HRB

All Steel Threaded Rock Bits

Bit Diameter Inch	Bit Diameter MM	Part Number	Wt./Lb.
E-Thread			
15/16"	24	SRB0937E	0.12
1"	25	SRB100E	0.12
1-1/8"	29	SRB112E	0.14
1-1/4"	32	SRB125E	0.16
H-Thread			
1-3/8"	35	SRB137H	0.44
1-1/2"	38	SRB150H	0.46
1-5/8"	41	SRB162H	0.56
1-3/4"	45	SRB175H	0.60
1-7/8"	48	SRB187H	0.82
2"	51	SRB200H	0.88
2-1/4"	57	SRB225H	1.16
2-1/2"	64	SRB250H	1.30
2-5/8"	67	SRB262H	1.34
D-Thread			
3-1/2"	89	SRB350D	2.90
4"	101	SRB400D	3.30

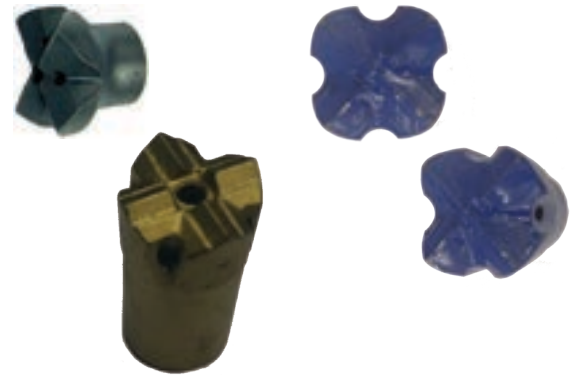

11 Degree Tapered Bits

Bit Diameter Inch	Part Number
1-1/8"	HTI-112-11M
1-1/4"	HTI-125-11M
1-3/8"	HTI-137-11M

Rope Threaded Bits and More!

We offer a line of Ballistic Button Bits and Rope Threaded Bits. Please call us for information and pricing!

Whirlibit - Speed Drills



Hexagon Shank



Bit Diameter	Drill Depth	Length U.C.	7/8" x 3-1/4"	Wt./Lb.	7/8" x 4-1/4"	Wt./Lb.	1" x 4-1/4"	Wt./Lb.
5/8"	6"	9"	WB7309625	1.50	WB7409625	1.75	-	-
	9"	12"	WB7312625	1.75	WB7412625	2.00	-	-
	15"	18"	WB7318625	2.00	WB7418625	2.25	-	-
	21"	24"	WB7324625	2.50	WB7424625	2.75	-	-
	27"	30"	WB7330625	3.00	WB7430625	3.25	-	-
3/4"	6"	9"	WB7309750	1.75	WB7409750	2.00	-	-
	9"	12"	WB7312750	2.00	WB7412750	2.25	WB1412750	2.50
	15"	18"	WB7318750	2.50	WB7418750	2.75	WB1418750	3.00
	21"	24"	WB7324750	3.00	WB7424750	3.25	WB1424750	3.50
	27"	30"	WB7330750	3.50	WB7430750	3.75	WB1430750	4.00
	33"	36"	WB7336750	3.75	WB7436750	4.00	-	-
7/8"	6"	9"	WB7309875	2.00	WB7409875	2.25	-	-
	9"	12"	WB7312875	2.50	WB7412875	2.75	WB1412875	2.50
	15"	18"	WB7318875	3.00	WB7418875	3.25	WB1418875	3.25
	21"	24"	WB7324875	3.75	WB7424875	4.00	WB1424875	4.00
	27"	30"	WB7330875	4.50	WB7430875	4.75	WB1430875	4.50
	33"	36"	WB7336875	5.00	WB7436875	5.25	WB1436875	5.50
1"	6"	9"	WB7336875	5.00	WB7436875	5.25	WB1436875	5.50
	9"	12"	WB7348875	6.25	WB7448875	6.50	-	--
	15"	18"	WB7312100	2.75	WB7412100	3.00	WB1412100	3.00
	21"	24"	WB7318100	3.50	WB7418100	3.75	WB1418100	4.00
	27"	30"	WB7324100	4.25	WB7424100	4.50	WB1424100	5.00
	33"	36"	WB7330100	5.25	WB7430100	5.50	WB1430100	5.75
1-1/8"	33"	36"	WB7336100	6.00	WB7436100	6.25	WB1436100	6.25
	45"	48"	WB7348100	7.50	WB7448100	7.75	-	-
	9"	12"	WB7312112	3.00	WB7412112	3.25	WB1412112	3.75
	15"	18"	WB7318112	4.00	WB7418112	4.25	WB1418112	4.50
	21"	24"	WB7324112	5.00	WB7424112	5.25	WB1424112	5.50
	27"	30"	WB7330112	6.00	WB7430112	6.25	WB1430112	6.75
1-3/16"	33"	36"	WB7336112	6.75	WB7436112	7.00	WB1436112	7.75
	45"	48"	WB7348112	8.75	WB7448112	9.00	WB1448112	10.0
	15"	18"	WB7318118	4.00	WB7418118	4.50	-	-
1-1/4"	21"	24"	WB7330118	5.00	WB7424118	5.25	-	-
	9"	12"	WB7312125	3.00	WB7412125	3.25	WB1412125	4.25
	15"	18"	WB7318125	4.00	WB7418125	4.25	WB1418125	5.50
	21"	24"	WB7324125	5.00	WB7424125	5.25	WB1424125	6.75
	27"	30"	WB7330125	6.00	WB7430125	6.25	WB1430125	8.00
	33"	36"	WB7336125	7.00	WB7436125	7.25	WB1436125	7.50
1-3/8"	45"	48"	WB7348125	8.75	WB7448125	9.00	WB1448125	11.5
	9"	12"	WB7312137	3.25	WB7412137	3.50	WB1412137	4.25
	15"	18"	WB7318137	4.00	WB7418137	4.25	WB1418137	5.50
	21"	24"	WB7324137	5.25	WB7424137	5.50	WB1424137	6.50
	27"	30"	WB7330137	6.25	WB7430137	6.50	WB1430137	8.00
1-1/2"	45"	48"	WB7348137	7.50	WB7448137	9.25	-	-
	9"	12"	WB7312150	3.25	WB7412150	3.50	WB1412150	4.00
	15"	18"	WB7318150	4.25	WB7418150	4.50	WB1418150	5.50
	21"	24"	WB7324150	5.25	WB7424150	5.50	WB1424150	6.75
	27"	30"	WB7330150	6.25	WB7430150	6.50	WB1430150	8.00
1-5/8"	45"	48"	WB7348150	9.00	WB7448150	9.00	-	-
	9"	12"	WB7312162	3.00	-	-	-	-
	15"	18"	WB7318162	4.00	-	-	-	-
	21"	24"	WB7324162	5.50	WB7418162	4.25	WB1424162	7.00
	27"	30"	WB7330162	6.50	WB7424162	5.75	-	-



Call today (800) 826-2672

Carbide Tipped Hollow Drills



C9 Shank Carbide Tipped Hollow Drills (3/4" Round Slotted)

Part Number	Bit Diameter	Drill Depth	Overall Length	Wt./Lb.
WB908313	5/16"	8" Solid	13"	0.75
WB908375	3/8"	8" Solid	13"	0.75
WB908438	7/16"	8" Solid	13"	1.00
WB908469	15/32"	8" Solid	13"	1.00
WB908500	1/2"	8"	13"	0.75
WB910500	1/2"	10-1/2"	16"	1.00
WB908563	9/16"	8"	13"	1.00
WB912563	9/16"	12"	17"	1.00
WB908625	5/8"	8"	13"	1.00
WB912625	5/8"	12"	17"	1.25
WB918625	5/8"	18"	23"	1.75
WB908750	3/4"	8"	13"	1.25
WB912750	3/4"	12"	17"	1.50
WB918750	3/4"	18"	23"	2.00
WB908875	7/8"	8"	13"	1.75
WB912875	7/8"	12"	17"	2.25
WB918875	7/8"	18"	23"	3.00
WB908100	1"	8"	13"	1.75
WB912100	1"	12"	17"	2.50

Part Number	Bit Diameter	Drill Depth	Overall Length	Wt./Lb.
WB918100	1"	18"	23"	3.50
WB923100	1"	23"	28"	4.50
WB908112	1-1/8"	8"	13"	2.00
WB912112	1-1/8"	12"	17"	2.75
WB918112	1-1/8"	18"	23"	3.75
WB908125	1-1/4"	8"	13"	2.25
WB912125	1-1/4"	12"	17"	2.75
WB918125	1-1/4"	18"	23"	4.00
WB908137	1-3/8"	8"	13"	2.25
WB912137	1-3/8"	12"	17"	3.00
WB918137	1-3/8"	18"	23"	4.00
WB908150	1-1/2"	8"	13"	2.25
WB912150	1-1/2"	12"	17"	3.00
WB918150	1-1/2"	18"	23"	4.00
WB908162	1-5/8"	8"	13"	2.50
WB912162	1-5/8"	12"	17"	3.00
WB918162	1-5/8"	18"	23"	4.00
WB908175	1-3/4"	8"	13"	2.50
WB912175	1-3/4"	12"	17"	3.25



Seize-Free Carbide Drill Bits

TAMCO's patented Seize-Free carbide drill bit combines a unique, spiral fluted design with increased air flow to the carbide tip. This prevents drill binding, the most common problem encountered when drilling through pavement overlays such as asphalt, concrete and stone.

Part Number	Bit Diameter	Drill Depth	Shank Size	Length U.C.	Wt./Lb.
THB7308822	7/8"	19"	7/8" x 3-1/4"	22"	3.25
THB7308827		24"	7/8" x 3-1/4"	27"	3.75
THB7308840		37"	7/8" x 3-1/4"	40"	5.25
THB7408822		19"	7/8" x 4-1/4"	22"	3.50
THB1408822		19"	1" x 4-1/4"	22"	3.75
THB1408827		24"	1" x 4-1/4"	27"	4.25

Visit us online for quote requests and more:
www.tamcotools.com



Air Tools - Rivet Busters / Tampers

Toku rivet busters are the ideal tool for any mid-sized demolition job you can throw at them. They perform under the toughest conditions, whether you're demolishing bridge decks, parking garages, ripping tanks, cutting rivet heads, or any demolition work. These hard hitting tools simply perform.

The Toku line of rivet busters are available with goose-neck or D-handles, and are available for either small buster or jumbo buster steel. All Toku rivet busters feature drop forged alloy handles, outside or inside lever designs, heat treated alloy cylinders, exhaust deflectors, and safety piston stoppers.

The Toku tamper is a rugged tool that comes with a steel tamping pad for compacting soil and substrate material around foundations, trenches, poles and other compacting applications.



**RB91HP
RB-91HPD (D Handle)**



**RB110
RB-110D (D Handle)**



JET06

	RB91HP RB-91HPD (D Handle)	RB110 RB-110D (D Handle)	JET06
Shank Size	1-1/8" Shank	1-1/8" Shank	N/A
Piston Stroke	8-15/16" (227mm)	11-15/16" (303mm)	5-1/2" (140mm)
Piston Diameter	1-3/16" (30.2mm)	1-3/16" (30.2mm)	1-1/2" (38mm)
Impact Rate	700 BPM	680 BPM	750 BPM
Weight	32 lbs. (14.3 kg.)	35 lbs. (14.6 kg.)	39.6 lbs. (18.0 kg.)
Overall Length	22-29/32" (582mm)	26" (660mm)	49" (1240mm)
Air Consumption	36.0 CFM	32.9 CFM	35.2 C.F.M.
Air Inlet Thread	3/8" NPT	3/8" NPT	1/2" NPT
Hose Size	1/2" (19mm)	1/2" (19mm)	1/2" (12.7mm)



Call today (800) 826-2672

Air Tools - American Made Rivet Busters

If an American made air tool is required for your job, this is your tool. TAMCO rivet busters are manufactured domestically and are a great addition to your tool needs. These tools are manufactured by American craftsmen and manufactured using high quality U.S. made components.

The TAMCO brand of rivet buster will perform tasks such as bridge-deck repair, vertical and/or horizontal concrete demolition, busting rivets and bolts, and for use on underground tanks.

Try the RB-4181 model for the really tough job. Available in gooseneck or optional "T" handle in 11" or 14".



	RB633	RB133	RB1133	RB90	RB4181/RB4181T
Type	Jumbo	Jumbo	Jumbo	Standard	Jumbo
Bore	1-3/16" (30.2mm)	1-3/16" (30.2mm)	1-3/16" (30.2mm)	1-1/16" (27mm)	1-3/16" (30.2mm)
Stroke	6"	8"	11"	9-27/32" (250mm)	11"
Impact Rate	1100 BPM	960 BPM	850 BPM	900 BPM	720 BPM
Length	20-1/2"	22"	25"	21-1/16"	26"
Weight	27.5 lbs.	30 lbs.	34 lbs.	28 lbs.	34.5 lbs.
Air Inlet Thread	1/2" (19mm)	1/2" (19mm)	1/2" (19mm)	3/8"	3/8"
Air Consumption	26-29 C.F.M.	44 C.F.M.	39 C.F.M.	27.9 C.F.M.	39 C.F.M.
Hose Size	1/2" (19mm)	1/2" (19mm)	1/2" (19mm)	1/2" (19mm)	1/2" (19mm)


Visit us online for quote requests and more:
www.tamcotools.com



Rivet Buster Steel

Product	Length	Jumbo Buster	Wt./Lb.	Box Qty.
Flat Chisels 	10"	3301-010C	2.25	25
	12"	3301-012C	2.50	25
	18"	3301-018C	3.75	15
	24"	3301-024	-	N/A
	36"	3301-036	-	N/A
	48"	3301-048	-	N/A

Standard Buster steels available in many styles and lengths!

Product	Length	Jumbo Buster	Wt./Lb.	Box Qty.
Bull / Moil Points 	10"	3311-010C	2.25	25
	12"	3311-012C	2.50	25
	18"	3311-018C	3.75	15
	24"	3311-024C	-	N/A
	36"	3311-036C	-	N/A
	48"	3311-048C	-	N/A


Standard Buster steels available in many styles and lengths!

Product	Length	Jumbo Buster	Wt./Lb.
Radius Blade 	1-1/8" X 10"	3301-810	1.85
	1-1/8" X 10"	3301-810SPEC	2.00



RIVET BUSTER BUSHING TOOL

- Manufactured from high quality alloy steel
- Jumbo shank size
- Weighs approximately 3 lbs.





Part #3382-012





Call today (800) 826-2672


Rivet Buster Steel

Product	Length	Jumbo Buster	Wt./Lb.	Small Buster	Wt./Lb.	Box Qty.
Ripper Chisels 	9"	3358-009	2.00	3258-009	1.50	25
	12"	3358-012	2.25	3258-012	2.25	25

Product	Rivet Size	Jumbo Buster	Wt./Lb.	Small Buster	Wt./Lb.	Box Qty.
Standard Blackout Punch 	3/8"	3360-009	-	3260-009	-	25
	1/2"	3361-009	1.50	3261-009	1.25	25
	5/8"	3362-009	1.50	3262-009	1.50	25
	3/4"	3363-009	1.75	3263-009	1.50	25
	7/8"	3364-009	1.75	3264-009	1.50	25
	1"	3365-009	2.00	N/A	-	25

Product	Rivet Size	Jumbo Buster	Wt./Lb.	Small Buster	Wt./Lb.	Box Qty.
4" Large Backout Punch 	5/8"	3370-010	1.75	3270-010	1.50	25
	3/4"	3371-010	2.00	3271-010	1.50	25
	7/8"	3372-010	2.2	3272-010	1.75	25

Product	Rivet Size	Jumbo Buster	Wt./Lb.	Small Buster	Wt./Lb.	Box Qty.
6" Large Backout Punch 	5/8"	3373-012	1.75	3273-012	1.50	25
	3/4"	3374-012	2.00	3274-012	1.75	25
	7/8"	3375-012	2.25	3275-012	2.00	25

Product	Rivet Size	Jumbo Buster	Wt./Lb.	Small Buster	Wt./Lb.	Box Qty.
8" Large Backout Punch 	5/8"	3376-014	2.00	3276-014	1.50	25
	3/4"	3377-014	2.25	3277-014	1.75	25
	7/8"	3378-014	2.50	3278-014	2.00	25

Product	Rivet Length	Part Number	Wt./Lb.	Box Qty.
2" Wide Rivet Buster Chisel 	9"	3307-012	2.50	20
	12"	3307-018	3.75	-

Product	Rivet Length	Part Number	Wt./Lb.	Box Qty.
3" Wide Rivet Buster Chisel 	12"	3342-012	3.00	15
	18"	3342-018	4.25	-

**** Please note that the 2" Wide and 3" Wide Chisel styles require a split sleeve - Item T33210300S. ****

Product	Rivet Length	Part Number	Wt./Lb.	Box Qty.
Drift Pin Tool 	8"	3398-008	1.75	25



Air Tools - Chipping Hammers

Toku's rugged TCH series of "D-handle" chipping hammers are available in 2" through 4" stroke lengths. All TCH series chipping hammers feature drop forged handles, replaceable bushings, heat treated alloy cylinders, and exhaust deflectors. The TCH line of hammers features a rock solid four bolt handle for maximum reliability and durability which allows a sure grip in all conditions. The TCH series is designed to only operate when the chisel is in contact with the work surface to avoid excessive wear caused by dry firing.

Toku's AA-OS chipping hammer proves bigger is not always better. It's lightweight and compact size allows for greater flexibility when working in tight spaces or small enclosures.



TCH2

TCH3

TCH4

THR3/THR4

	TCH2	TCH3	TCH4	THR3 / THR4
Shank Size	.680" Round Shank or .580" Hex Shank with Round or Oval Collar (Please Specify)			Screw on Retainer
Piston Stroke	2" (50.8mm)	2-1/2" (63.5mm)	4" (101.6mm)	4" (101.6mm)
Piston Diameter	1-1/8" (28.54mm)	1-1/8" (28.54mm)	1-1/8" (28.54mm)	1-1/8" (28.54mm)
Impact Rate	2,600 - 2,800 BPM	2,000 - 2,200 BPM	1,600 - 1,800 BPM	1,600 - 1,800 BPM
Weight	18 lbs. (8.1 kg.)	19 lbs. (8.55 kg.)	20 lbs. (9 kg.)	22 lbs. (9.9 kg.)
Overall Length	14-3/4" (374.65mm)	16" (406.4mm)	17" (431.79mm)	18-1/2" (431.79mm)
Air Consumption	29.75 CFM	31.5 CFM	33.25 CFM	33.25 CFM
Air Inlet Thread	7/8" x 24 Thrds/In NPT	7/8" x 24 Thrds/In NPT	7/8" x 24 Thrds/In NPT	7/8" x 24 Thrds/In NPT
Hose Size	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)



Call today (800) 826-2672

Air Tools - Chipping Hammers

Toku's THA series of gooseneck chipping hammers are available in 1" through 4" stroke lengths. The THA series utilizes a saw tooth connection between the handle and cylinder which provides a more secure, positive fit.





	AAOS	THA1	THA2	THA3	THA4
Shank Size	.680" Round Shank or .580" Hex Shank with Round or Oval Collar (Please Specify)				
Piston Stroke	1-13/16" (45mm)	1" (25.4mm)	2-3/32" (51mm)	2-17/32" (64mm)	4-1/32" (102mm)
Piston Diameter	7/8" (22.2mm)	1-1/8" (28.54mm)	1-1/8" (28.54mm)	1-1/8" (28.54mm)	1-1/8" (28.54mm)
Impact Rate	3,000 - 3,200 BPM	2,500 BPM	2,300 BPM	2,200 BPM	1,800 BPM
Weight	7.9 lbs. (3.6 kg.)	14.8 lbs. (5.9 kg.)	15.8 lbs. (6.2 kg.)	16.5 lbs. (6.8 kg.)	18.25 lbs. (7 kg.)
Overall Length	12-3/4" (374.65mm)	15-9/32" (388mm)	16-1/4" (413mm)	17-23/32" (450mm)	18-29/32" (480mm)
Air Consumption	22.95 CFM	28 CFM	29.75 CFM	31.8 CFM	33.25 CFM
Air Inlet Thread	3/8" NPT	3/8" NPT	3/8" NPT	3/8" NPT	3/8" NPT
Hose Size	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)


Visit us online for quote requests and more:
www.tamcotools.com




Chipping Hammer Steel

Product	Length	Wt./Lb.	RSOR	HSOR	RSRR	HSRR	Box Qty.
 <p>Flat Chisels</p>	9"	1.25	1401-009	1501-009	1601-009	1701-009	25
	12"	1.75	1401-012	1501-012	1601-012	1701-012	25
	18"	2.50	1401-018	1501-018	1601-018	1701-018	20
	24"	3.00	1401-024	1501-024	1601-024	1701-024	15
	36"	5.25	1401-036	1501-036	1601-036	1701-036	N/A
	48"	6.00	1401-048	1501-048	1601-048	1701-048	
	60"	9.00	1401-060	1501-060	1601-060	1701-060	
	72"	9.25	1401-072	1501-072	1601-072	1701-072	
	84"	12.50	1401-084	1501-084	1601-084	1701-084	
	96"	14.50	1401-096	1501-096	1601-096	1701-096	

Product	Length	Wt./Lb.	RSOR	HSOR	RSRR	HSRR	Box Qty.
 <p>Bull / Moil Points</p>	9"	1.25	1411-009	1511-009	1611-009	1711-009	25
	12"	1.75	1411-012	1511-012	1611-012	1711-012	25
	18"	2.50	1411-018	1511-018	1611-018	1711-018	20
	24"	3.50	1411-024	1511-024	1611-024	1711-024	15
	36"	5.25	1411-036	1511-036	1611-036	1711-036	N/A
	48"	7.00	1411-048	1511-048	1611-048	1711-048	
	60"	9.25	1411-060	1511-060	1611-060	1711-060	
	72"	11.00	1411-072	1511-072	1611-072	1711-072	
	84"	12.50	1411-084	1511-084	1611-084	1711-084	
	96"	14.50	1411-096	1511-096	1611-096	1711-096	

Product	Length	Wt./Lb.	RSOR	HSOR	RSRR	HSRR	Box Qty.
 <p>2" Wide Flat Blade</p>	9"	1.25	1407-009	1507-009	1607-009	1707-009	25
	12"	1.75	1407-012	1507-012	1607-012	1707-012	25
	18"	2.50	1407-018	1507-018	1607-018	1707-018	20
	24"	3.50	1407-024	1507-024	1607-024	1707-024	15
	36"	5.25	1407-036	1507-036	1607-036	1707-036	N/A
	48"	7.00	1407-048	1507-048	1607-048	1707-048	
	60"	9.25	1407-060	1507-060	1607-060	1707-060	
	72"	11.00	1407-072	1507-072	1607-072	1707-072	
	84"	12.50	1407-084	1507-084	1607-084	1707-084	
	96"	14.50	1407-096	1507-096	1607-096	1707-096	


Product	Length	Wt./Lb.	RSOR	HSOR	RSRR	HSRR	Box Qty.
 <p>3" Wide Flat Blade</p>	12"	2.00	1442-012	1542-012	1642-012	1742-012	15


** Longer lengths are available for narrow chisels, moil points, and 2" wide flat blades **




Call today (800) 826-2672

Chipping Hammer Steel

Product	Length	Wt./Lb.	RSOR	HSOR	RSRR	HSRR	Box Qty.
1-1/2" Wide Flat Blade 	9"	N/A	1406-009	1506-009	1606-009	1706-009	Box Quantities Vary
	12"		1406-012	1506-012	1606-012	1706-012	
	18"		1406-018	1506-018	1606-018	1706-018	

Product	Length	Wt./Lb.	RSOR	HSOR	RSRR	HSRR	Box Qty.
Bushing Tools 	9"	2.50	1482-009	1582-009	1682-009	1782-009	10

Product	Length	Wt./Lb.	RSOR	HSOR	Box Qty.
Ground Rod Drivers 3/4" Rod Size 	12"	3.75	1492-012.75	1592-012.75	N/A

Impact Wrenches

TAMCO offers industrial grade, American made Impact Wrenches!

Our 3/4" and 1" Impact Wrenches offer a stainless steel hammer case and twin hammer design for increased durability. These are one of the industry's highest power-to-weight ratios. 100% made in the U.S.A. with non-corrosive materials, constructed to last in the field.



7506SS



7508SS

	7506SS	7508SS	IW1DI	IW15DI
Square Drive	3/4" SQ Dual Retainer	1" SQ Dual Retainer	1"	1-1/2"
Max Torque (Forward)	1800 ft-lbs	1800 ft-lbs	2000 ft-lbs	3000 ft-lbs
Max Torque (Reverse)	2000 ft-lbs	2000 ft-lbs	N/A	N/A
Free Speed	4600 rpm	4600 rpm	-	-
Length	9"	9"	12-13/32"	14-1/2"
Weight	13.5 lbs	13.5 lbs	22 lbs	33 lbs
Air Inlet Thread	3/8"	3/8"	1/2"	1/2"
Rec'd Hose Size	1/2"	1/2"	1/2"	1/2"
Avg. Air Consumption	58 cfm	58 cfm	58cfm	70 cfm

These Heavy-Duty Impact Wrenches feature a twin hammer clutch for more power per pound, a pressure fed clutch lubrication system, two piece motor housing for easy maintenance, and a built-in muffler for low noise.

Also available with an outside trigger and open handle. The 1" model has a recommended hose size of 3/4".



IW1DI



IW15DI

Visit us online for quote requests and more:
www.tamcotools.com



Manifolds

Eliminate clutter and run just one hose to your worksite! Connect from four to eight pneumatic tools at once. Equipped with a gauge to monitor pressure. All models are stackable!!




Part Number	Outlets	Capacity	Working Pressure	Test Pressure	Inlet Size	Tank Dia.	Weight
5G	4	5 gallon	200 psi	300 psi	1"	10"	36 lbs.
15G	8	15 gallon	200 psi	300 psi	2"	12"	72 lbs.

Dust Collection Units

BUST THE DUST with VDEX!

VDEX is the abbreviation for Vacuum Dust EXtraction system.

Part Number	Description
3P	Dust Collection Pail, with 10' Vacuum Hose
CH-VDEX	Chipping Hammer Vacuum Attachment
CH-QC-VDEX	Quick Change Retainer Chipping Hammer Series
PB-RD-VDEX	Paving Breaker/Rock Drill Vacuum Attachment
RB-VDEX	Rivet Buster Vacuum Attachment
RH-VDEX	Roto Hammer Vacuum Attachment
SC-VDEX-IBL	Needle Scaler Vacuum Attachment
2198-VDEX	Bellow (O.A.L. 8")
2199-VDEX-WP	Water Plug for use with VDEX Attachments
WS3	Water Suppression Kit, 3' Hose with Mount

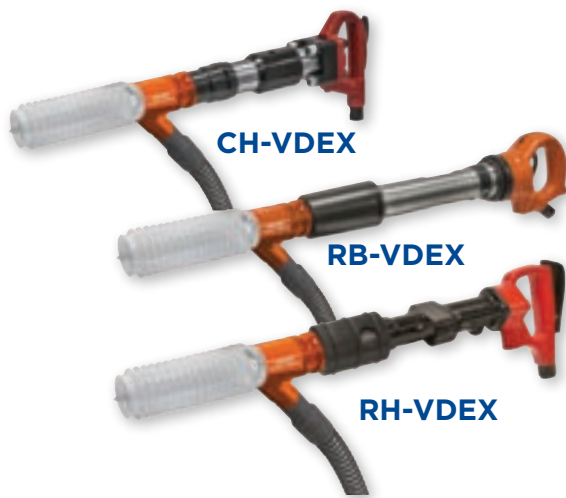

These products meet or exceed all OSHA requirements for silica removal handling! VDEX attachments are the industry's first uniquely designed attachment for pneumatic tools. Check out our website for videos and to request detailed information.



Call today (800) 826-2672

Air Tools - Weld Flux and Scalers / Rammers

Weld Flux and Scalers

The SF-A1L1 and SF-A1L2 weld flux and needle scalars utilize Cleco style steel and are available with standard throttles, push type throttles, or solid backhead type.

The SF-A182 series of weld flux and needle scalars use Ingersoll-Rand style steel and are available with standard throttle, solid backhead, or pistol grip styles.

We also offer an imported version of the Cleco weld flux and needle scaler, as well as replacement parts and needles for all of the tools.

(The SF-A1L1 and SF-A182NS come with a bag of 19 standard 7" needles. Part number S834024.)



	CLEO SF-A1L1	CLECO SF-A1L2	IR SF-A182NS	IR SF-A182WF
Bore	1"	1"	15/16"	15/16"
Stroke	1-1/8"	1-1/8"	1-1/16"	1-1/16"
Impact Rate	4,600 B.P.M.	4,600 B.P.M.	4,000 B.P.M.	4,000 B.P.M.
Length	17"	10"	18"	9"
Weight	6.25 lbs.	4.20 lbs.	6.00 lbs.	4.00 lbs.
Air Inlet Thread	1/4"	1/4"	1/4"	1/4"
Air Consumption	12 C.F.M.	12 C.F.M.	13 C.F.M.	13 C.F.M.



Rammers

TAMCO offers a variety of rammers for the job site, foundry, or mill. All tools feature heat treated alloy steel cylinders, innovative features and rugged construction. TAMCO has the ideal tool for any of your compaction needs.

These rugged and reliable tools will provide years of service on any job site.

Optional steel or rubber heads are available for all TAMCO rammers.



	SF-1BA	SF-2BAR	SF-OBR	SF-00BA
Bore	1"	1"	1"	11/16"
Stroke	4"	2-1/2"	2"	2"
Taper/Diameter	0.802"	0.802"/.687"	0.802"/.645"	S Taper/.460"
Impact Rate	1,240 B.P.M.	1,725 B.P.M.	2,500 B.P.M.	1,600 B.P.M.
Length	20-1/4"	15-1/4"	16-1/2"	11-3/4"
Weight	10 lbs.	7.125 lbs.	6.65 lbs.	3.75 lbs.
Air Inlet Thread	3/8"	3/8"	1/4"	3/8"
Butt Diameter	2-1/2"	2-1/2"	2-1/2"	1-3/4"

Visit us online for quote requests and more:
www.tamcotools.com



Weld Flux / Scaler Steel



1851-007

Cleco Style Shank

Description	7" Part Number	Wt./Lb.	12" Part Number	Wt./Lb.	18" Part Number	Wt./Lb.
1-3/8" Std. Wide Scaler	1851-007	0.50	1851-012	0.75	1851-018	1.25
2" Wide Scaler	1807-007	0.50	1807-012	0.75	1807-018	1.50
3" Wide Scaler	1842-007	0.50	1842-012	1.00	1842-018	1.50
3/4" Wide Narrow Scaler	1853-007	0.50	1853-012	0.75	1853-018	1.25
1-3/8" Wide Spoon Scaler	1854-007	0.50	1854-012	0.75	1854-018	1.25
Bull / Moil Point	1811-007	0.50	1811-012	0.75	1811-018	1.25



2051-007

Ingersoll-Rand Style Shank

Description	7" Part Number	Wt./Lb.	12" Part Number	Wt./Lb.	18" Part Number	Wt./Lb.
1-3/8" Std. Wide Scaler	2051-007	0.50	2051-012	0.75	2051-018	1.25
2" Wide Scaler	2007-007	0.50	2007-012	1.00	2007-018	1.50
3" Wide Scaler	2042-007	0.50	2042-012	1.00	2042-018	1.40
3/4" Wide Narrow Scaler	2053-007	0.75	2053-012	0.75	2053-018	1.25
1-3/8" Wide Spoon Scaler	2054-007	0.50	2054-012	0.75	2054-018	1.25
Bull / Moil Point	2011-007	0.50	2011-012	0.75	2011-018	1.25



2151-007

Chicago Pneumatic Style Shank

Description	7" Part Number	Wt./Lb.	12" Part Number	Wt./Lb.	18" Part Number	Wt./Lb.
1-3/8" Std. Wide Scaler	2151-007	0.50	2151-012	0.75	2151-018	1.25
2" Wide Scaler	2107-007	0.50	2107-012	1.00	2107-018	1.50
3" Wide Scaler	2142-007	0.75	2142-012	1.00	2142-018	1.50
3/4" Wide Narrow Scaler	2153-007	0.50	2153-012	0.75	2153-018	1.25
1-3/8" Wide Spoon Scaler	2154-007	0.50	2154-012	0.75	2154-018	1.25



2201-007

.401 Parker Taper Style Shank

Description	7" Part Number	12" Part Number	18" Part Number	24" Part Number
Flat 1/2" Wide Chisel	2201-007	2201-012	2201-018	2201-024
Offset 1/2" Flat Chisel	2202-007	2202-012	2202-018	N/A
Sidecut 1/2" Chisel	2203-007	2203-012	2203-018	N/A
Wide Flat 1-1/4" Blade	2205-007	2205-012	2205-018	2205-024
Bull/Moil Point	2211-007	2211-012	2211-018	N/A
Flat 3/4" Chisel	2253-007	2253-012	2253-018	2253-024

2253-907F



2262-007



Description	Part Number
Spotweld Breaker	2253-907F
Punch	2262-007



Call today (800) 826-2672

Light Duty Air Hammer / Wizard



.401 Shank Light Duty Hammer

Our .401 shank hammer has a lightweight aluminum handle for light chipping, casting and foundry work. Spring style retainer included. Optional deluxe quick change retainer available.

TAM-401	
Bore	0.75"
Stroke	2-5/8"
Impact Rate	3500 bpm
Length	6-3/4"
Weight	3.5 lbs.
Air Inlet Thread	1/4"
Rec'd Hose Size	3/8"
Avg. Air Consumption	4 cfm

Wizard Demolition Tool



The Wizard is a hybrid demolition tool combining the best aspects of a chipping hammer and rivet buster. This tool is lightweight with good hitting power and control, making it a great option for horizontal and vertical applications. The Wizard uses Jumbo rivet buster steel and Jumbo accessories.

RB-185D	
Bore	1-3/16"
Stroke	4"
Impact Rate	1500 bpm
Length	17-15/16"
Weight	18.5 lbs.
Air Inlet Thread	1/2"
Rec'd Hose Size	1/2"
Avg. Air Consumption	35 cfm

Scabblers and Scabblers Accessories

TAMCO offers a Triple-piston Scabblers for use in roughing up concrete and steel surfaces. The three piston action will help remove a variety of unwanted surface debris for a variety of applications, including paint and rust removal.



SF-T3

Triple Piston Scabblers			
Bore	1"	Length	11"
Stroke	13/16"	Weight	8.25 lbs.
Impact Rate	5,200 B.P.M.	Air Inlet Thread	3/8"
Height	5-7/8"	Air Consumption	15 C.F.M.



Steel



Carbide



Spark Resistant

Triple Piston Scabblers Accessories

Part Number	Description
SF-00146	Steel Piston
SF-00146C	Carbide Piston
SF-00146REX	Rexalloy Piston - Non Sparking/Spark Resistant

Visit us online for quote requests and more:
www.tamcotools.com



Air Tool Accessories

Retainers

Part Number	Description
T25119002	Oval Retainer - Solid Type (Fits Toku THA, THH, and TCH Series Chippers)
T25119008	Round Retainer - Solid Type (Fits Toku THA, THH, and TCH Series Chippers)
T25129103	Deluxe Quick Change Retainer (Fits Toku THA, THH, and TCH Series Chippers)
Y10298230	Oval Retainer - Solid Type (Fits Toku AA-OS Series Chippers)
Y10298230R	Round Retainer - Solid Type (Fits Toku AA-OS Series Chippers)
T2512906S	Quick Change Retainer - Screw on Type (Fits Toku THR Series)



T25119002



T25119008



T25129103

Whip Checks

Part Number	Description
WA2	Safety Cable - 1/4" x 38" - Fits hose sizes 1-1/2" to 3"
WB1	Safety Cable - 1/8" x 20" - Fits hose sizes 1/2" to 1-1/4"



Side Rod Kit SRKIT-60 OR SRKIT-90

Part Numbers include:	Description
131501017	Front Head Bolt for 90 lb Paving Breaker
131501016	Front Head Bolt for 60 lb Paving Breaker
410241550	Front Head Bolt Nut
130801043	Front Head Bolt Spring
410241560	Front Head Bolt Lock Washer



Assembled

130801043



130801043



130801043



Latch Kit LKIT-60/90

Part Numbers include:	Description
410241610	Steel Retainer Latch
131303048	Washer
136301010R	Bushing
410241650	Plunger
130801042	Spring
410241620	Bolt
134601019	Nut

Other model parts are available and in stock. Call for pricing!



410241620

410241610

131303048

1363010010R

134601019

130801042

410241650



Call today (800) 826-2672

Air Tool Accessories



Mufflers

Part Number	Description
41027187C	Muffler for a PB 90
41024187C	Muffler for a PB 60
41023187C	Muffler for a PB 40
41020187C	Muffler for a PB 30
430101Y1C	Muffler for a TJ-15

Accessories

Part Number	Description
Y10212300	Retainer Spring (Fits Toku THH, THA, TCH, and AA-OS Series Chippers)
SF-01038	3/8" NPT x 1/2" Hose Barb Swivel Assembly
SF-01040	7/8" x 24 Threads/In x 1/2" Hose Barb Swivel Assembly
SF-01060	1/2" NPT x 1/2" Hose Barb Swivel Assembly
SF-UF37	3/8" Female Universal Chicago Fitting
SF-UM37	3/8" Male Universal Chicago Fitting
SF-UF50	1/2" Female Universal Chicago Fitting
SF-UM50	1/2" Male Universal Chicago Fitting
SF-UF75	3/4" Female Universal Chicago Fitting
SF-UM75	3/4" Male Universal Chicago Fitting



Barb Swivel Assembly



Chicago Fitting



Lock Spring




Upper Sleeve and Lower Sleeve



Black Rubber Bumpers



Poly Orange or Red Bumpers



(Assembled with steel)

Rivet Buster Accessories

Part Number	Description
T33210100	Jumbo Buster Upper Sleeves
T33210300	Jumbo Buster Lower Sleeves
T33210300S	Jumbo Buster Lower Sleeves (Split)
T33210400	Jumbo Buster Rubber Bumper
T33210400PJR	Jumbo Buster Poly Red Bumper
T33219400	Jumbo Buster Lock Spring
T33210400PJO	Jumbo Buster Poly Orange Bumper
Part Number	Kits
18741	Kit: Upper/Lower/Spring/Black Rubber Bumper
18826	Kit: Upper/Lower/Spring/Red PolyBumper



All Weather!

Useable down to temperatures of -30° F

Air Tool Oil

Part Number	Description
ATOGL	Air Tool Oil - One Gallon



Air Tool Accessories



Whip Hoses

Part Number	Description
WH5-3/8	5 foot Whip Hose - 3/8" NPT Swivel End, rated 250 PSI
WH5-7/8	5 foot Whip Hose - 7/8" x 24" Thread/In Swivel End, rated 250 PSI
WH5-1/2	5 Foot Whip Hose - 1/2 ID, 1/2 Bent Swivel, rated 250 PSI
WH10-3/8	10 foot Whip Hose - 3/8" NPT Thread/In Swivel End, rated 250 PSI
WH10-1/2	10 foot Whip Hose - 1/2" NPT Swivel End, rated 250 PSI
WH10-7/8	10 foot Whip Hose - 7/8" X 24" Thread/In Swivel End, rated 250 PSI
AH50	50 foot Air Hose - 3/4" Hose w/Universal Fittings, rated 300 PSI

Whip Hoses with Oilers

Part Number	Description
WH6-1/2OILS	Whip Hose 1/2" x 6' with 1/2" Swivel and Inline Oiler
WH6-3/8OILS	Whip Hose 1/2" x 6' with 3/8" Swivel and Inline Oiler
WH6-7/8OILS	Whip Hose 1/2" x 6' with 7/8" Swivel and Inline Oiler
WH8-CPOILS	Whip Hose 3/4" x 8' with Universal Fittings and Inline Oiler



Hydraulic Hoses

Part Number	Description
HYD6-3/8	Whip Hose 1/2" x 6' with 3/8" Swivel
HYD6-1/2	Whip Hose 1/2" x 6' with 1/2" Swivel
HYD6-7/8	Whip Hose 1/2" x 6' with 7/8" Swivel


In-Line Oilers


Part Number	Description
OL	In-Line Oiler 1.4 Fluid Oz.
1L	In-Line Oiler 3.7 Fluid Oz.
2L	In-Line Oiler 11.0 Fluid Oz.
3L	In-Line Oiler 16.0 Fluid Oz.
430101VOJ	L0-15 Clearview In-Line Oiler 6.0 Fluid Oz.





Call today (800) 826-2672

Electric Demo Hammer Steel

Product	Part Number	Description	Length	Wt./Lb.	Box Qty.
 <p>Spline Drive</p>	44-01811T	Chisel 1" Blade	12"	1.50	25
	44-01812T	Chisel 1" Blade	18"	2.25	25
	44-01813T	Moil Point	12"	1.50	25
	44-01814T	Moil Point	18"	2.25	25
	44-01817T	Scaling Chisel 2" Blade	12"	1.75	25
	44-01819T	Scaling Chisel 2" Blade	18"	2.50	25
	44-01810T	Scaling Chisel 3" Blade	12"	2.25	25
	44-01809T	Bushing Tool (1 Pc.)	10"	2.75	5
	44-01822T	Clay Spade	18"	4.50	5
	44-01824T	Ground Rod Driver	12"	3.00	10

Product	Part Number	Description	Length	Wt./Lb.	Box Qty.
 <p>3/4" Hex</p>	44-01517T	Chisel 1" Blade	12"	1.50	25
	44-01518T	Chisel 1" Blade	18"	2.25	25
	44-01515T	Moil Point	12"	1.50	25
	44-01516T	Moil Point	18"	2.25	25
	44-01529T	Scaling Chisel 2" Blade	12"	1.75	25
	44-01503T	Scaling Chisel 3" Blade	12"	2.25	25
	44-01520T	Bushing Tool (1 Pc.)	10"	2.75	15

Product	Part Number	Description	Length	Wt./Lb.	Box Qty.
 <p>1-1/8" Electric</p>	44-02161T	Moil Point	21-1/2"	6.00	8
	44-02163T	Narrow Chisel	21-1/2"	6.00	8
	44-02164T	Chisel 3" Blade	20-1/2"	6.75	8
	44-02167T	Asphalt Cutter 5" Blade	20"	8.50	5
	44-02169T	Clay Spade	20"	9.75	8

Product	Part Number	Description	Length	Wt./Lb.	Box Qty.
 <p>SDX Max</p>	44-01911T	Chisel 1" Blade	12"	1.25	25
	44-01912T	Chisel 1" Blade	18"	1.75	25
	44-01913T	Moil Point	12"	1.25	25
	44-01914T	Moil Point	18"	1.75	25
	44-01915T	Narrow Chisel	24"	N/A	N/A
	44-01916T	Moil Point	24"	N/A	N/A
	44-01917T	Scaling Chisel 2" Blade	12"	1.25	25
	44-01910T	Scaling Chisel 3" Blade	12"	1.50	25
	44-01909T	Bushing Tool (16 Teeth)	10"	2.75	15
	44-0191718T	Scaling Chisel, 2"	18"	3.00	10
	44-0191724T	Scaling Chisel, 2"	24"	N/A	N/A
	44-0191018T	Scaling Chisel, 3"	18"	N/A	N/A
	44-0191024T	Scaling Chisel, 3"	24"	N/A	N/A

Other model parts are available and in stock. Call for pricing.

Visit us online for quote requests and more:
www.tamcotools.com



Boom Mounted Demo Steel

TAMCO'S MOST POPULAR BRANDS

We currently stock the brands you rely on and offer a line of boom mounted demo tools for these manufacturers.

	BOOM MOUNTED DEMO TOOLS	STOCKED BRANDS
<i>Allied</i>	X	X
<i>Atlas Copco/Epiroc</i>	X	X
<i>Bobcat/Melroe</i>	X	X
<i>CP</i>	-	X
<i>Husky/IPC</i>	X	X
<i>Indeco</i>	X	X
<i>Kent/FRD</i>	X	X
<i>Magnum</i>	X	X
<i>NPK</i>	X	X
<i>Okada</i>	X	X
<i>Rammer</i>	X	-
<i>Stanley</i>	X	-
<i>Teledyne</i>	X	-
<i>Toku/Striker</i>	X	X
<i>Toro-Dingo</i>	-	X
<i>Tramac</i>	X	X

ATLAS COPCO/EPIROC	KENT/FRD	NPK	CHICAGO PNEUMATIC	STRIKER/TOKU	OKADA	BOBCAT
SB52	KF1/FX15	GH2	RX 3	TNB-2M	TOP35	HB680
SB102	KF2/FX25	GH3	RX 4	TNB-3M	TOP45	HB880
SBU160	KF3/KF3/FX35	GH4	RX 6	TNB-4M	TOP60	HB980
SB202/SBU220	KF4/FX45	GH6	RX 8	TNB-5M	TOP100	HB1180
PB210	KF5/FX55	GH9	RX 11	TNB-6E	TOP200	
SB302/SBU340	KF6/FX65	GH10	RX 25/26			
SB452	KF12	GH12	RX 29			
SB552	KF19	GH15	RX 45/46			
MB500	KF27	GH18				
MB700	FX125					
MB750	FX175					
MB1000	FX275					
MB1200	FX375					
MB1500	FX475					
HB3000	-					
HB3600	-					

CALL FOR PRICING

- MADE TO ORDER -



1		Moil Point	4		Wide Cross-Cut Chisel
2		Cross-Cut Chisel	5		Wide Inline Chisel
3		Inline Chisel	6		Blunt



Call today (800) 826-2672

Hand Tools

Stone Splitting Wedges and Shims

Hole Size	Length	Wedge Part Number	Shim Part Number
3/8"	2-1/2"	45-01594	45-01597
1/2"	2-5/8"	45-01566	45-01597
5/8"	2-3/4"	45-00727	45-00735
3/4"	4"	45-00731	45-00739
7/8"	5"	45-01570	45-01582
1"	6"	45-00740	45-00741
1-1/4"	8"	45-01568	45-01569
1-3/8" to 1-5/8"	12"	45-01571	45-01583
1-3/8" to 1-5/8"	18"	45-01572	45-01584
1-3/8" to 1-5/8"	24"	45-01573	45-01585
1-3/8" o 1-5/8"	36"	45-01575	45-01587
1-3/8" to 1-5/8"	48"	45-01577	45-01589

All wedges and shims are sold by the individual piece.

Alloy Wedges

Diagram	Part Number	Height	Width	Length	Wt./Lb.
	6601-004	1/4"	1/2"	4"	0.25
	6602-006	1/4"	1/2"	6"	0.25
	6611-004	3/8"	3/4"	4"	0.25
	6612-004	3/8"	1"	4"	0.25
	6621-006	1/2"	3/4"	6"	0.50
	6622-007	1/2"	1"	7"	0.50
	6623-008	1/2"	1-1/2"	8"	1.00
	6631-008	5/8"	1-1/4"	8"	1.00
	6632-006	5/8"	2"	6"	1.25
	6641-007	3/4"	3/4"	7"	0.50
	6642-006	3/4"	1"	6"	0.75
	6643-012	3/4"	1"	12"	1.75
	6651-007	7/8"	1"	7"	1.00
	6661-008	1"	1"	8"	1.25
	6662-012	1"	1-1/2"	12"	2.75
	6663-012	1"	3"	12"	5.00
	6671-010	1-1/2"	2"	10"	5.00
	6681-008	2"	2"	8"	4.50
	6682-012	2"	2"	12"	6.75
	6683-012	2"	3"	12"	12.75

Carbon Right Angle Wedges

Diagram	Part Number	Height	Width	Length	Wt./Lb.
	6881-003C	1/4"	3/4"	3"	0.25
	6882-006C	1/2"	1"	6"	0.50
	6883-008C	3/4"	1-1/2"	8"	1.00
	6884-008C	1"	1-1/2"	8"	1.50
	6885-008C	1-1/4"	1-1/4"	8"	2.00
	6886-010C	1-1/2"	1-1/2"	10"	3.00
	6887-012C	1-3/4"	1-3/4"	12"	5.00
	6888-012C	2"	2"	12"	7.00


Visit us online for quote requests and more:

www.tamcotools.com




Hand Tools


Alloy Banana Wedge

	Part Number	Height	Width	Length	Wt./Lb.
	6696-013UNB	13/16"	13/16"	13"	1.25
	6696-813UNB (With 3/16" Dia. Hole)				


Flange Wedge

	Part Number	Height	Width	Length	Wt./Lb.
	6650-011FLNG	7/8"	7/8"	11"	1.25


Alloy Barrel Drift Pins

	Part Number	Pin Diameter	Rivet Size	End	Center	OAL	Wt./Lb.
	6531-006	7/16"	3/8"	1-3/4"	2-1/2"	6"	0.25
	6532-006	9/16"	1/2"	2"	2-1/2"	6-1/2"	0.25
	6533-007	11/16"	5/8"	2-1/4"	2-1/2"	7"	0.50
	6534-007	13/16"	3/4"	2-1/4"	3"	7-1/2"	0.75
	6535-008	15/16"	7/8"	2-1/2"	3"	8"	1.00
	6536-008	1-1/16"	1"	2-3/4"	3"	8-1/2"	1.50
	6537-009	1-3/16"	1-1/8"	3"	3"	9"	2.00
	6538-009	1-5/16"	1-1/4"	3-1/8"	3-1/4"	9-1/2"	2.75


Carbon Barrel Drift Pins

	Part Number	Pin Diameter	Rivet Size	End	Center	OAL	Wt./Lb.
	6534-008C	13/16"	3/4"	2-1/2"	3"	8"	0.75
	6535-008C	15/16"	7/8"				1.00
	6536-008C	1-1/16"	1"				1.50
	6537-008C	1-3/16"	1-1/8"				1.75

Sheeters Chisel

	Part Number	Style	Blade Width	Body Stock	Length
	5952-008	Std.	1-3/4"	5/8"	8"
	5907-008	Heavy Duty	2"	3/4"	8"


Flat Chisel

	Part Number	Body Stock	Length
	5401-008	3/4"	8"
	5401-010		10"
	5401-012		12"
	5501-008	7/8"	8"
	5501-010		10"
	5501-012		12"
	5601-008	1"	8"
	5601-012		12"




Call today (800) 826-2672

Maintenance Bars




Pinch Bars

Stk. Size	Part Number	OAL
1/2"	7001-018	18"
	7001-024	24"
5/8"	7002-018	18"
	7002-024	24"
3/4"	7003-018	18"
	7003-024	24"
	7003-036	36"
	7003-048	48"
7/8"	7004-036	36"
	7004-048	48"
	7004-060	60"
1"	7005-036	36"
	7005-048	48"
	7005-060	60"
	7005-072	72"




Lining Bars

Stk. Size	Part Number	OAL
5/8"	7202-036	36"
3/4"	7203-024	24"
	7203-036	36"
7/8"	7204-024	24"
	7204-060	60"
1"	7205-048	48"
	7205-060	60"
	7205-072	72"



Needle Bars

Stk. Size	Part Number	OAL
3/4"	7001-018	60"
7/8"	7504-048	48"
	7504-060	60"
1"	7505-060	60"
	7505-072	72"




Chisel Bars

Stk. Size	Part Number	OAL
7/8"	7404-036	36"
	7404-060	60"
	7404-072	72"
1"	7405-060	60"



Nickle Chrome Plated Pinch Bars

Stk. Size	Part Number	OAL
7/8"	7004-030NCP	30"



Gooseneck Bars

Stk. Size	Part Number	OAL
3/4"	7603-036	36"
1"	7605-048	48"
	7605-072	72"

General Tool Maintenance

- Oiling is the most important step in tool maintenance
- Blow out moisture in air line BEFORE connecting the tool
- Examine tool for loose bolts, nuts, handles, side-rods, retainers
- Check air connections / fittings - for damage
- On rivet busters, check sleeves, bumpers, springs
- Check chisel / points for shank wear
- Run tool at proper PSI (90 PSI)
- When running air tool, always keep against the work surface
- Always disconnect tool from airline when changing steel or performing maintenance
- At end of day flush the tool with oil and cycle a few times to lubricate internal parts for storage
- Store in a dry location



Tool Racks & Steel Display Cases

Don't settle for clutter - upgrade your organization game with us!

Discover a better way to keep your workspace organized!



Inquire today about our tool racks, steel display case solutions.

Visit us online for quote requests and more:
www.tamcotools.com





Ph: (800) 826-2672 • (724) 258-6622

**STOCKING
WAREHOUSES:**

Hayward, CA
Riverside, CA

**MANUFACTURING AND
CORPORATE OFFICE:**

1466 Delberts Drive
Monongahela, PA 15063

sales@tamcotools.com

V1-23

Visit www.tamcotools.com or scan QR Code
for quote requests and more!

